

Design by Nahtrang Design

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP20
Light source 1:	2 x LED Samsung 8W Warm White - 3000K 297 lm ^(N) CRI 80
Total power consumption (W):	8
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee (Years):	5
Units per box:	12
Net Weight (Kg):	0.59
EAN:	8435111091524





MATERIALS / FINISHES

Structure material:	Aluminium Steel	Diffuser material:	Methacrylate
Structure finish:	Matt white Chrome	Diffuser finish:	Transparent



The photograph may not match the reference exactly. Please read the product description to identify the finish.

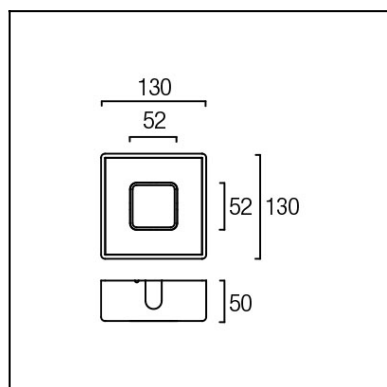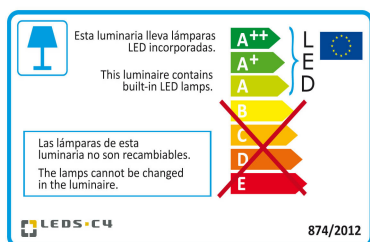
[Download photometric file .ldt / .ies](#)[Click on image to download energy label](#)

Luminaire			Measur.			Lamp	
Code	05-0047-BW-BW		Code	05-0047-BW-BW		Code	05-0047-BW-BW
Name	Aplique LOW leds 2x4W		Name	Aplique LOW leds 2x4W		Number	1
Line	Eulumdat		Date	18-03-2013		Position	
Efficiency			100.00%		Coordinate system		CG
Maximum value			106.66 cd		Position		C=90.00 G=10.00
Asymmetrical							
Rectangular Luminaire			Length		50 mm		Width
Rectangular Luminous Area			Length		25 mm		Width
					130 mm		30 mm
Horizontal Luminous Area			0.000750 m2		Emitting area on Plane 180°		0.003250 m2
Emitting area on Plane 0°			0.003250 m2		Emitting area on Plane 270°		0.003900 m2
Emitting area on Plane 90°			0.003900 m2		Glare area at 76°		0.003335 m2
Symmetry Type			Asymmetrical		Maximum Gamma Angle		180
Measurement Distance			0.00		Measurement Flux		400.23 lm
Operator			Asselum T2		Source voltage		
Temperature			25.00 °C		Source current		
Humidity			60.00 %		Photocell		
Notes							

50mm x 130mm




C Halfplanes

ULOR	50.00 %
DLOR	50.00 %
RN	50.00 %

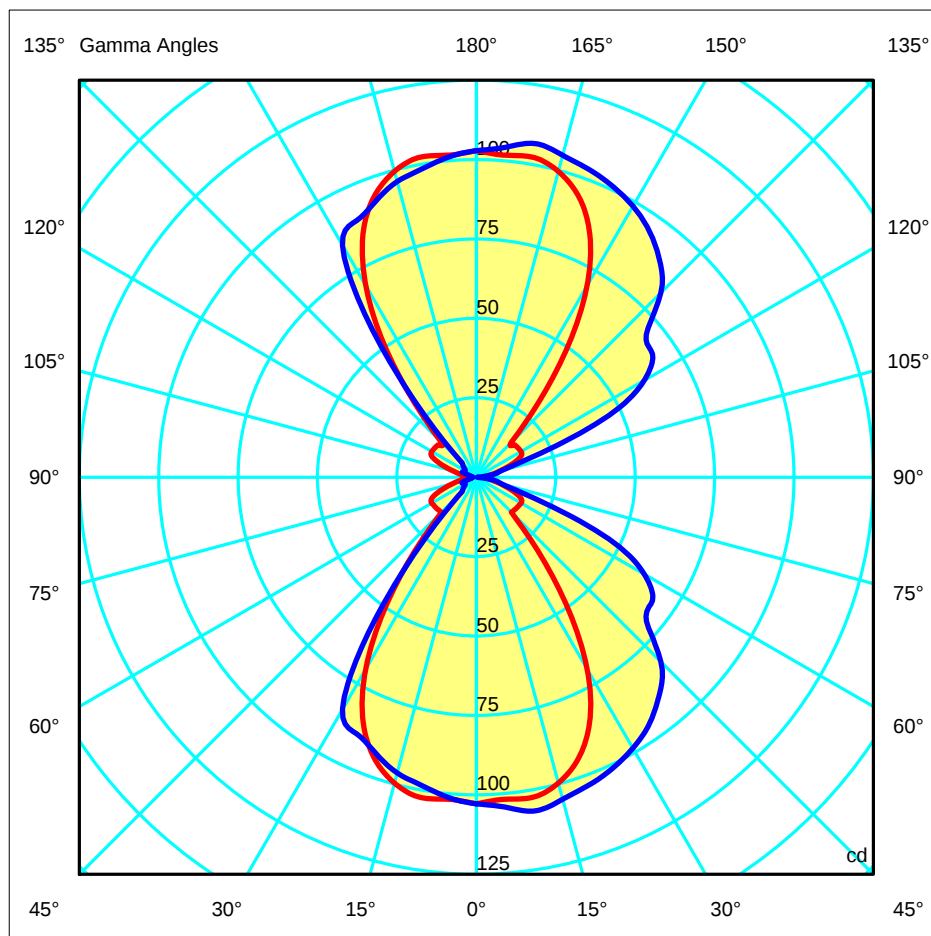


steel (matt white/chrome) /
acero (mate blanco/cromado)

aluminum (matt white) /
aluminio (mate blanco)

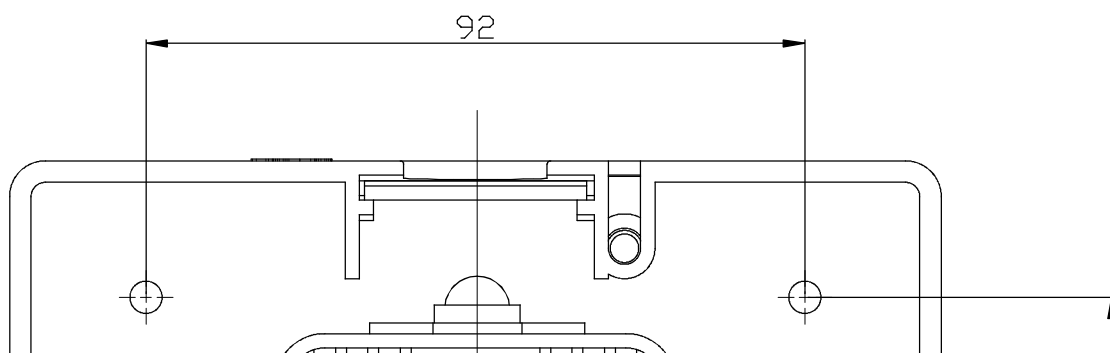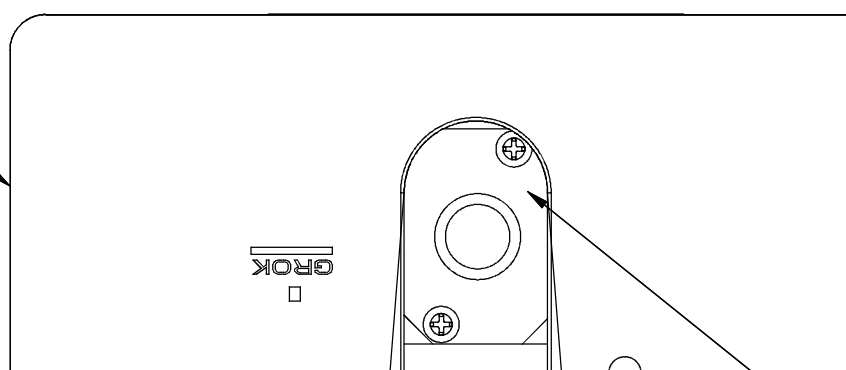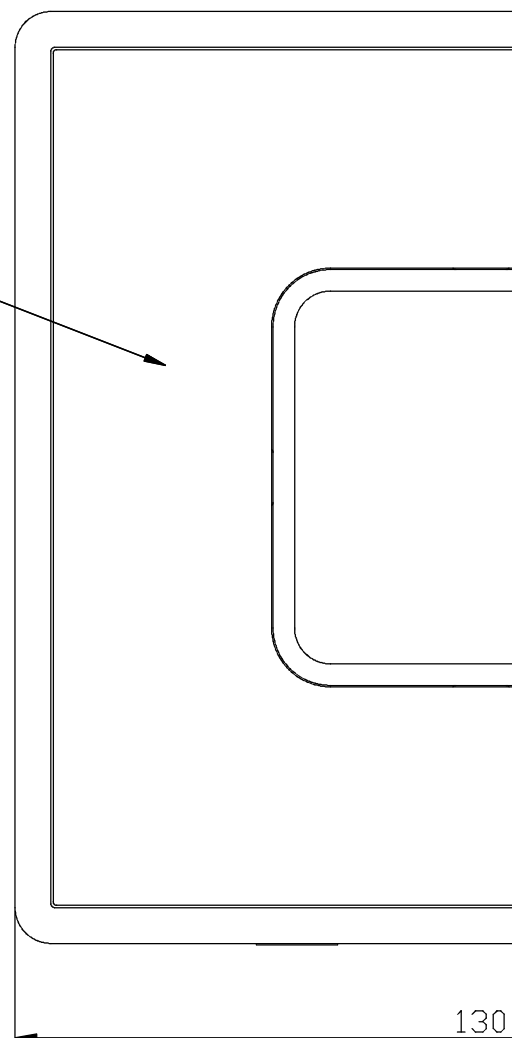


acr
acr


1

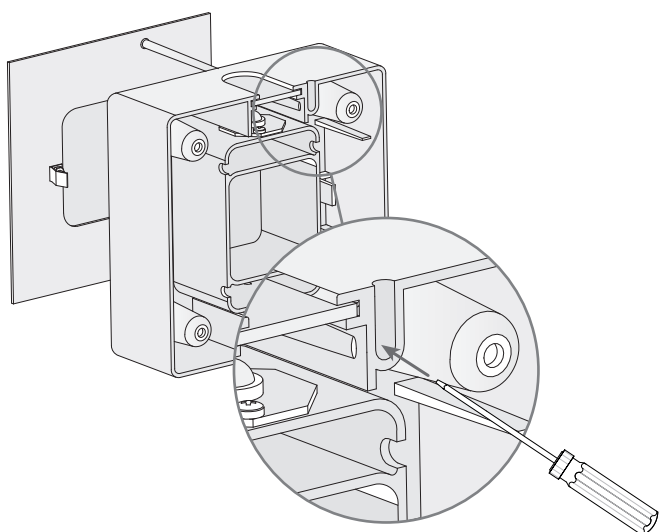


2

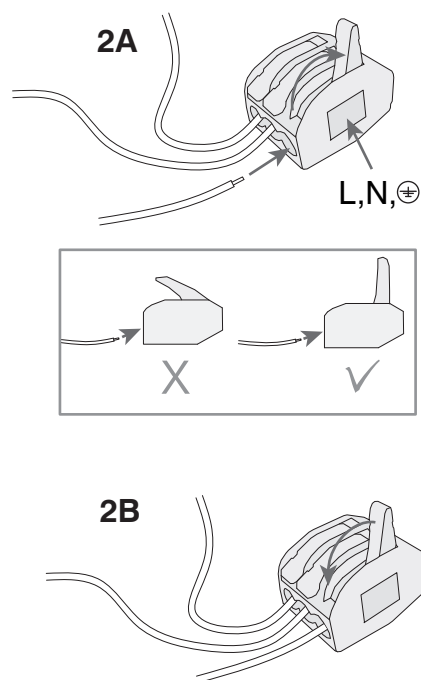


3

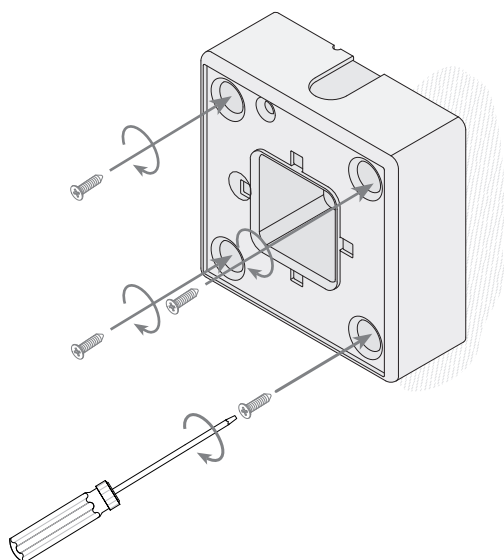

4

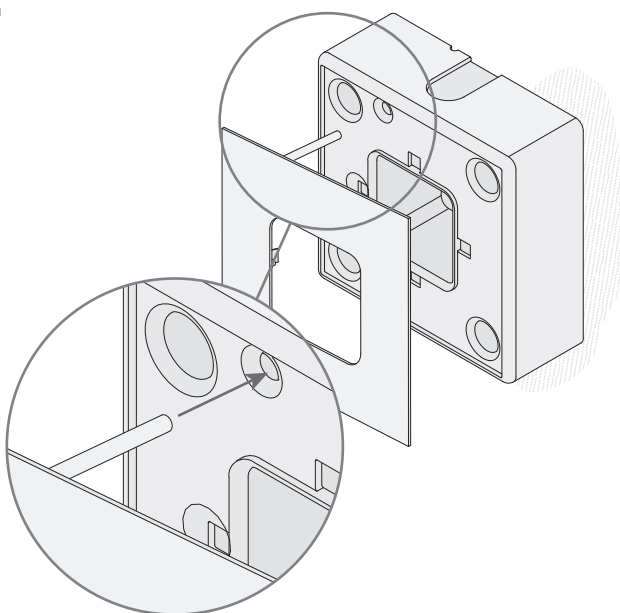

5

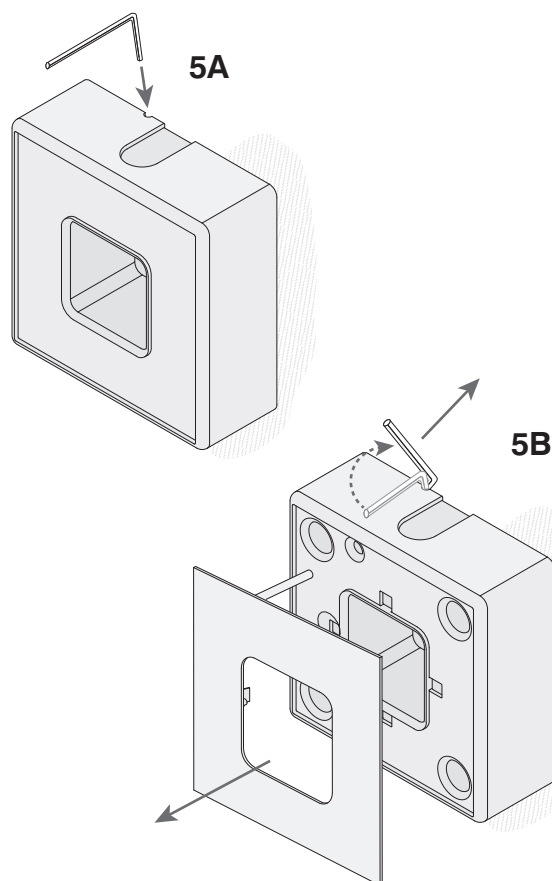

6

