



## Design by Gemma Bernal



The photograph may not match the reference exactly. Please read the product description to identify the finish.

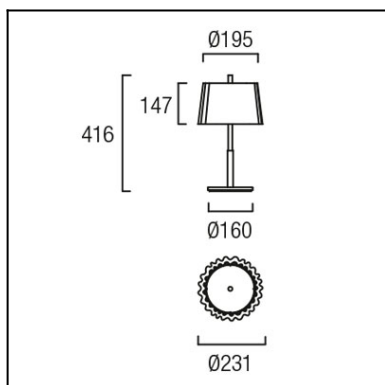


[Download photometric file .ldt / .ies](#)

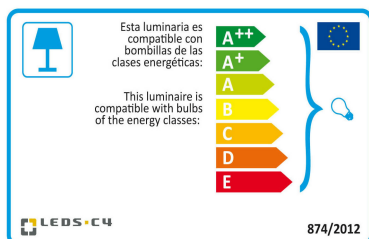

[Click on image to download energy label](#)

### TECHNICAL CHARACTERISTICS

Type:	Table lamp
IP Protection degrees:	IP20
Light source 1:	2 x E14 max15W Maximum lamp length: 100.00 mm Maximum lamp diameter: 45.00 mm
Total power consumption (W):	30
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	1
Net Weight (Kg):	2.5
EAN:	8435111083260




### MATERIALS / FINISHES

<b>Structure material:</b>	Steel	<b>Diffuser material:</b>	Methacrylate
<b>Structure finish:</b>	Chrome	<b>Diffuser finish:</b>	Transparent

<b>Luminaire</b>			<b>Measur.</b>			<b>Lamp</b>	
Code	10-4413-21-M2		Code	10-4413-21-M2		Code	PL ELEC11W/827 E14
Name	Portatil 2x11W PL E14		Name	Portatil 2x11W PL E14		Number	2
Line	Eulumdat		Date	07-09-2011		Position	
Efficiency			50.58%		Coordinate system		CG
Maximum value			226.71 cd		Total Flux		1200.00 lm
			Position		C=75.00 G=25.00		Double Symmetrical
Round Luminaire			Diam.	190 mm		Height	380 mm
Round Luminous Area			Diam.	190 mm		Height	70 mm
Horizontal Luminous Area			0.028353 m2		Emitting area on Plane 180°		0.013300 m2
Emitting area on Plane 0°			0.013300 m2		Emitting area on Plane 270°		0.013300 m2
Emitting area on Plane 90°			0.013300 m2		Glare area at 76°		0.019764 m2
Symmetry Type			Double Symmetrical		Maximum Gamma Angle		90
Measurement Distance			0.00		Measurement Flux		1200.00 lm
Operator			Asselum T2		Source voltage		
Temperature			25.00 °C		Source current		
Humidity			60.00 %		Photocell		
Notes							

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	PL ELEC11W/827 E14	PL ELEC11W/827 E14 - 11.00 W	600.00	11.00	2	
C.I.E.	42 77 95 100 51	D DIN 5040				
F UTE	0.51 E	B NBN		A30		
				BZ 5		


Diam=190mm





C Halfplanes


180.0 — 0.0  
270.0 — 90.0

ULOR 0.00 %  
DLOR 50.58 %  
RN 0.00 %

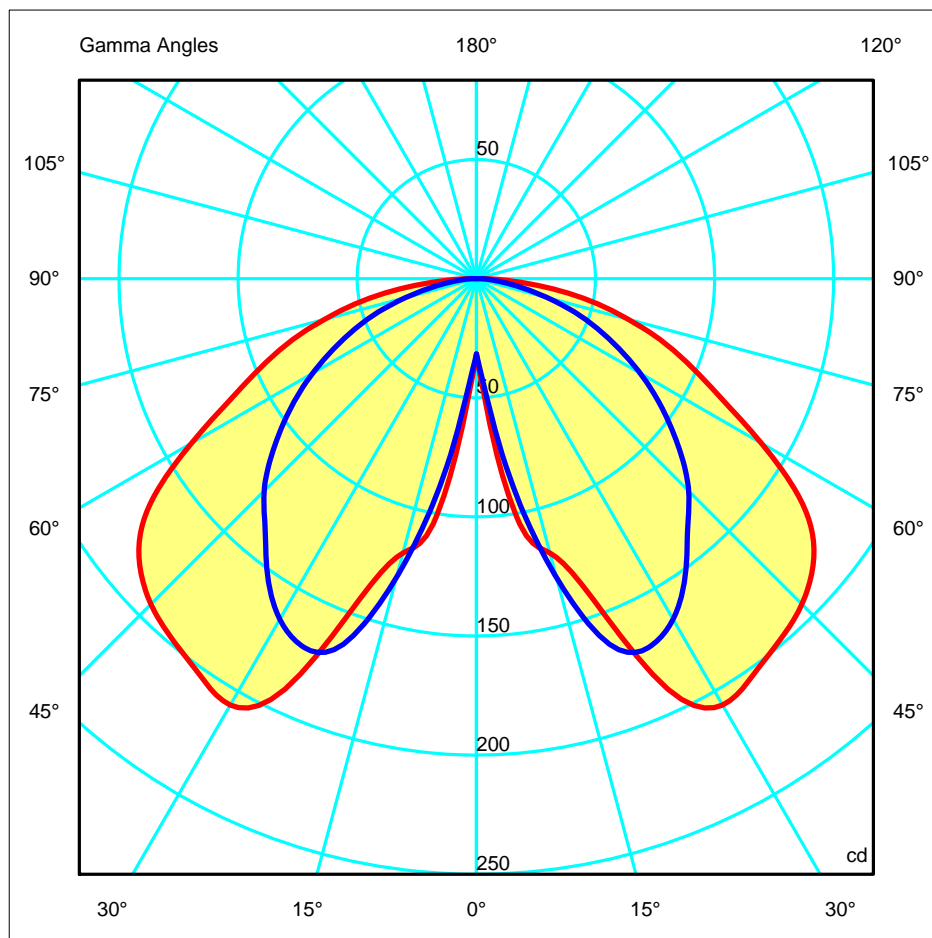


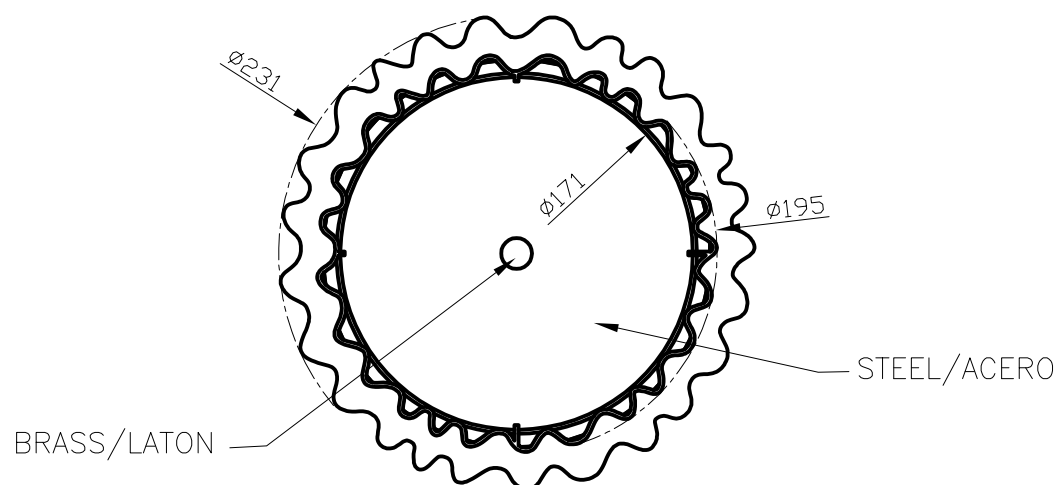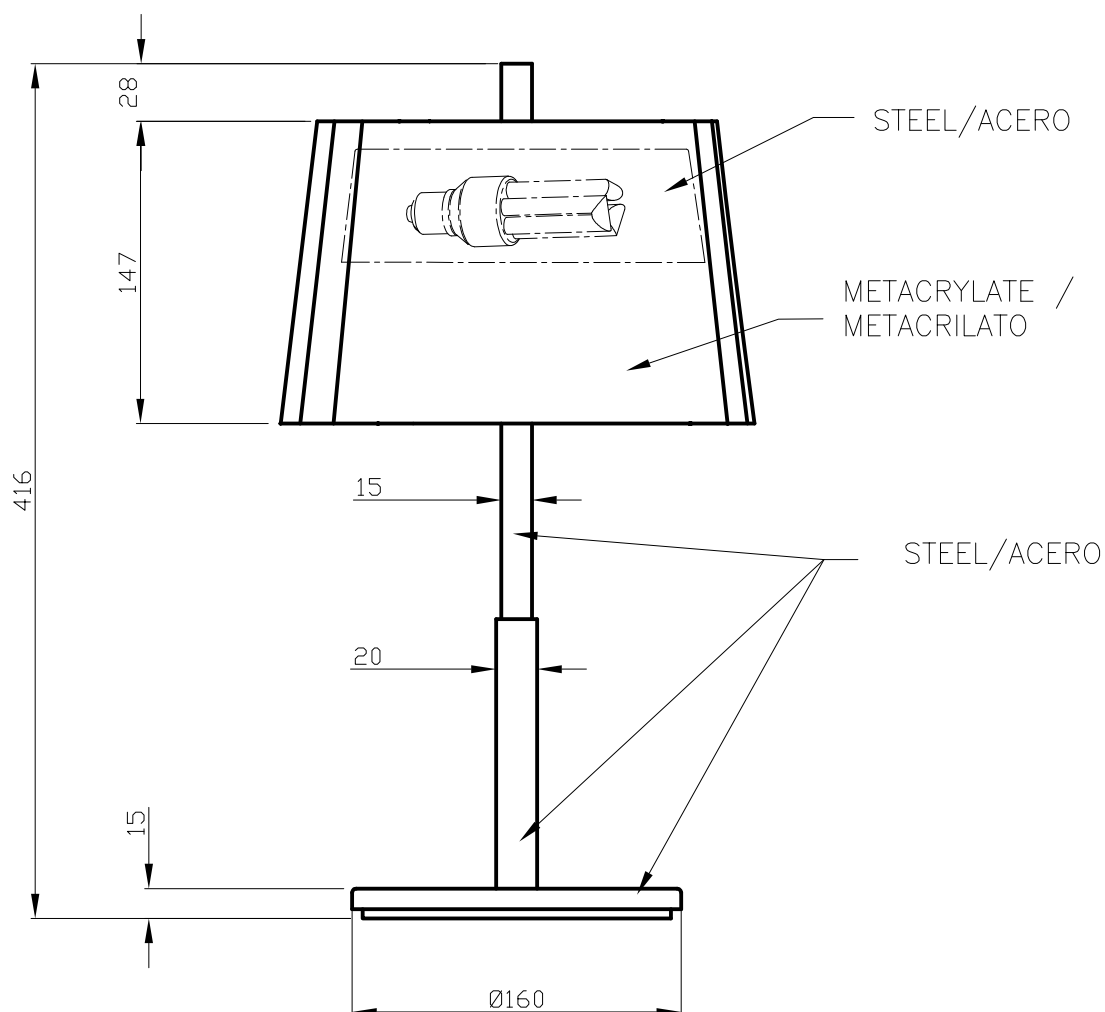

**1**

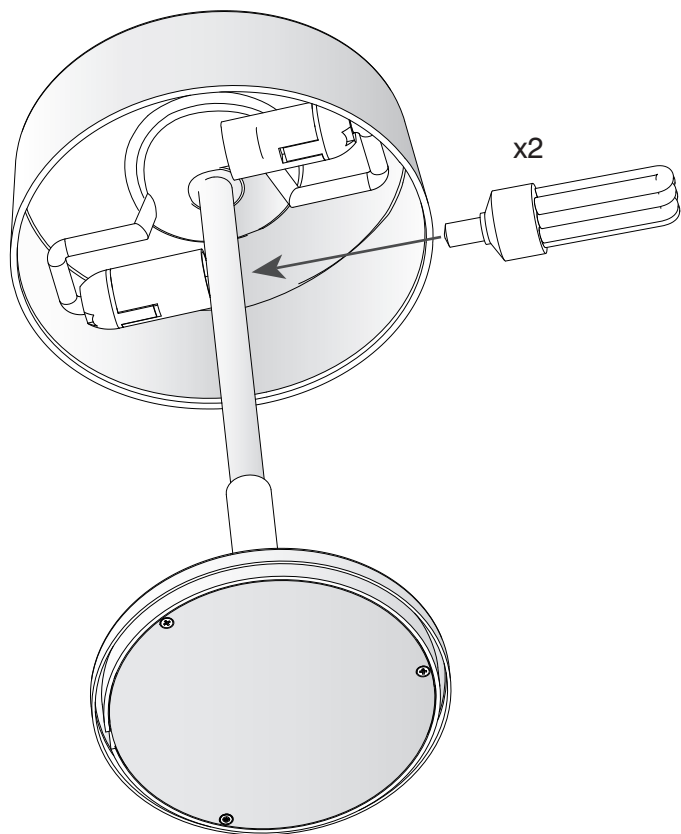

**2**

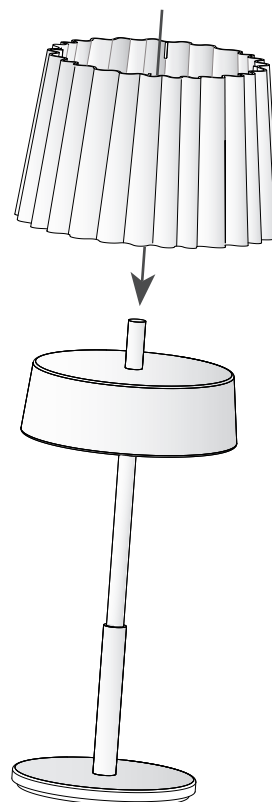

**3**

