





## EVOLVE Fire Rated Tilt Downlight Range



**EVOT**

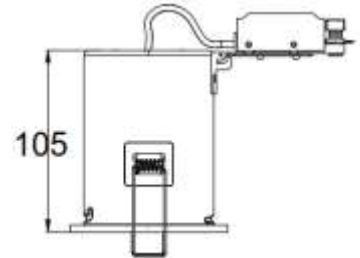

**EVOXL T**

<b>Rim Diameter c/w Bezel (supplied separately)</b>	91mm	91mm
<b>Rim Diameter without bezel</b>	86mm	86mm
<b>Cut Out</b>	82mm	82mm
<b>Can Length</b>	94mm	105mm
<b>Tilt Angle</b>	20°	20°
<b>Recommended product location</b>	Indoor	
<b>Finishes available</b>	Black	
<b>Control Gear Type</b>	N/a	
<b>Lamp Supplied</b>	No	
<b>Class</b>	Class I. Must be Earthed	
<b>IP</b>	IP20	
<b>Photometric Testing</b>	Yes	
<b>Instruction sheet</b>	Yes	
<b>Origin of manufacture</b>	China	
<b>Main materials:</b>		
• <b>Chassis</b>	Pressed Steel	
• <b>Bezel</b>	Interchangeable Twist and lock (Not supplied)	
<b>Method of fix</b>	Twin spring loaded brackets	
<b>Lampholder cap and make</b>	GU10	
<b>Electrical Connections</b>	10Amp L.NE Nylon Push-in screwless Connector,	
<b>F mark</b>	Yes	
<b>CE mark</b>	Yes	
<b>Quality Assurance System</b>	Yes ISO 9001 QMS	
<b>Batch coding details on product</b>	Yes	
<b>Certificate of Conformity (Held on File)</b>	Yes	
<b>Manufactured in accordance</b>	EN60598-1 General requirements EN60598-2-1 Fixed general purpose luminaires EN60598-2-2 Recessed luminaires BS5250 (Energy efficiency, Useful heat loss and passage of condensation), BS EN ISO 140 (Parts 1 & 2):1997. (Acoustic), Part P (Installation requirements) BS476 – Part 21 & Part 23 Fire rating (30, 60, 90 minutes)	