
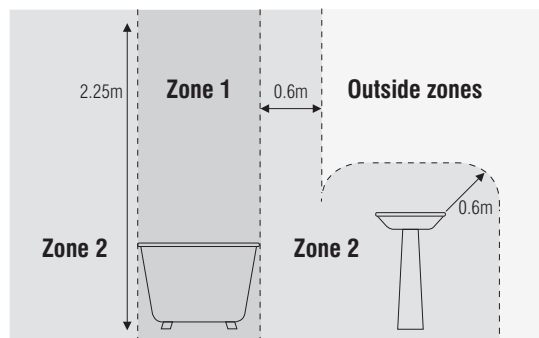


INSTRUCTION MANUAL

Safety Warnings

- This product is only suitable for connection to a 240V~50Hz supply in accordance with current IEE wiring regulations. It should be installed in accordance with local building regulations and is for domestic use only.
- Before installing your light fitting always switch off the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation.
- This is a Class 2 double insulated  product. It does not require an Earth, and Live or Neutral must not be connected to Earth. See wiring diagram below..
- This product contains delicate parts – be careful during handling and maintenance to avoid breakage.
- This light may be installed in Zones 1 and 2 and Outside Zones of a bathroom where water jets are not used for cleaning purposes. If installing in a bathroom, a 30mA RCD must be used in accordance with IEE Wiring Regulations and the Building Regulations. An electrician must be consulted if in any doubt about your own competency or meaning of bathroom “Zones”, “Equipotential Bonding” or “RCD”.
- If you are in any doubt about your competence please consult a qualified electrician.
- If any modification is made it will invalidate the warranty and may render the product unsafe.
- This product is not suitable for use with a dimmer switch.



Care Information

Allow 10 minutes to cool before replacing, adjusting or cleaning.
Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

Assembly / User Instructions

Before you start

Please read these instructions carefully before fitting and retain for reference. Check the packaging and make sure that you have all the required parts. Follow each assembly step in order to prevent incorrect assembly. Ensure that the product is fully assembled as illustrated before use.

The assembly diagrams overleaf are intended as a guide – if in doubt consult a qualified electrician.

The Light pack contains:

Light fitting.
Terminal connection block.
Fixing pack.

The following tools may be required:

Selection of cross and flat head screwdrivers.
Electric drill and assorted drill bits.
Wire strippers.
Electrical insulation tape.

1. Decide on the position of the light fitting / or remove existing light fitting. Take a note of the position of the electrical connections. Ensure there is a solid mounting surface.
2. Using the wall back as a template, mark and drill the fixing holes. Take care not to damage any concealed wiring or pipes. The distance between the mounting holes is 580mm.
3. Remove the end caps (A) and keep safe for refitting later.
4. Remove the waterproof cover and set aside for refitting later (B).
5. Connect the house wiring according to the Terminal Block diagram below. Pass the house wiring cable through the long grommet and connect to terminals. Ensure no strands of wire escape the Terminal Block (C).
6. Refit waterproof cover set aside earlier (D).
7. Fix the light in position using the supplied screws and wall plugs. (E)
8. Refit end caps set aside earlier (F).
9. Turn on the power and test. Switch on using rocker switch (G).

