






DropLED
UK/EU EC0991XX

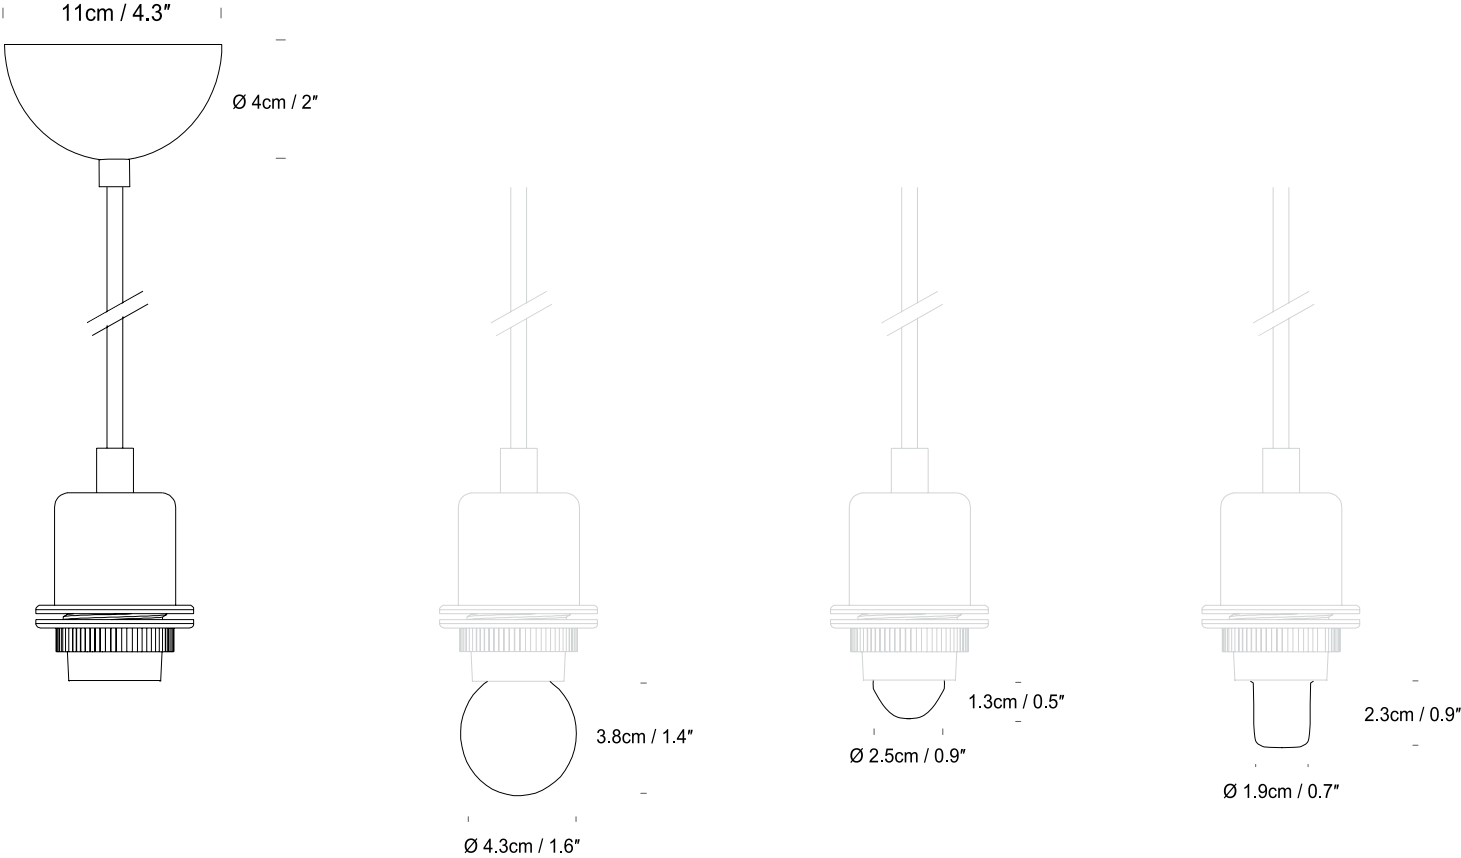

Colour + EAN/UPC Code

	01 - White (RAL 9003 Gloss) EAN: 5060481942966
	02 - Black (RAL 9005 Gloss) EAN: 5060481942973
	04 - Satin Nickel EAN: 5060481942980



Category	Pendant / Ceiling Mount	IP Rating	IP20	LED Chip	Epistar	Energy Efficiency	
Material	Steel	Bathroom Zone	Zone 3	Wattage	12W	Energy Efficiency Class:	F
Cable	4m / White - White PVC. Black - Black PVC. Satin Nickel - Clear PVC.	Weight	0.45KGS	Luminous Flux	900lm	Energy Consumption:	12 kWh/1000h
Lightsource	Integrated AC LED Module	Individual Carton Size	13.5cm x 13.5cm x 14cm	Colour Temp	3000K	This product uses a 230v Driverless AC LED from Paragon and is packaged with 3 different clip in diffusers/lenses. Beam Angle 60°	
Switched	No	Individual Carton Weight	0.5KGS	CRI	90CRI		
Class	Class II - Double Insulated	Shipping Carton Quantity	24 Units	Lifetime	40,000Hrs		
F Mark	Suitable for Mounting on Flammable Materials	Shipping Carton Size	43cm x 30cm x 60cm	LDT / IES Files	Available on www.innermost.net	Smart Compatibility This product is compatible with most Bluetooth/ Wifi systems. Please contact us about the Tuya + Cassambi options we can offer.	
		Shipping Carton Weight	17.0KGS	Dimmable	Phase Dimming		