

Halogen standard lamp, clear RJH-A 77W/240/C/XE/E27

Logistic Data

Article No.	22318040
Code	RJH-A 77W/240/C/XE/E27
Product EAN	4008597180408
Customs tariff no.	85392192
Box quantity (pcs.)	20
EAN Box	4008597480409
Gross weight of box in kg	0.794
Length of box in m	0.29
Width of box in m	0.23
Height of box in m	0.11
Pieces per palette	4760
ETIM class	EC000038
ETIM class name	Mains voltage halogen lamps without reflector



Electric Parameters



Lamp nominal wattage	77 W
Rated wattage	77.0 W
Comparable Wattage incandescent lamp	100 W
Mains voltage	240 V
Lamp's nominal current	0.32 A
Nominal current (mA)	321 mA
Power factor	1.00
Energy Consumption kWh/1000h	77

Light Application Parameters

Luminous flux	1320 lm
Rated lamp luminous flux	1320 lm
Luminous efficiency of lamp	17.14 lm/W
Colour temperature	2800 K
Colour rendering index Ra	100

Service Life

Mean service life	2000 h
Info about service life	3B50, 50Hz
No. switching cycles	50000

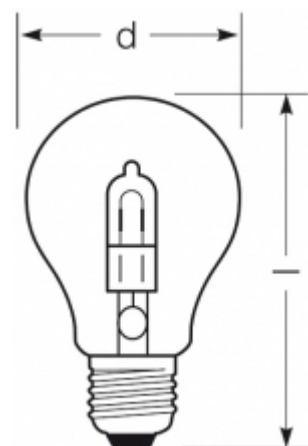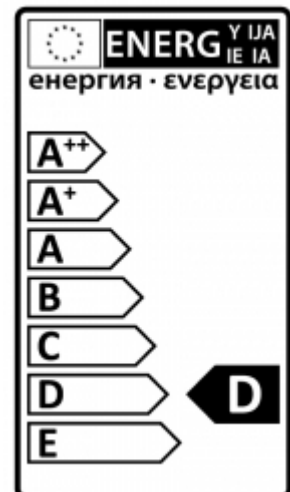

Specification

Diameter max.	55 mm
Length max.	96 mm
dimmable	ja
Energy Label	C
Energylabel from 2013	D
Ignition time	0 s
Mercury content	0.0 mg
Base	E27

Notes on Operation

Burning position	any
------------------	-----

Miscellaneous

EU Directive	DIM1
ILCOS name	HSGSA/C/UB-77-240-E27-56
LBS name	QA60 77W/c E27

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage. The field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Notes

Base




E27
IEC/EN 60061-1
sheet 7004-21-9

Spectrum


As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament. The addition of halogens to the filling gas enhance the efficiency and prevents blackening. Further increase in efficiency can be achieved by adding Xenon and/or IRC-coating.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

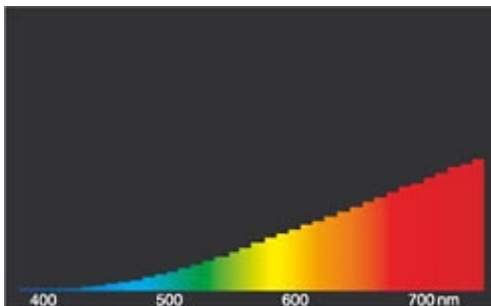

light of incandescent lamps

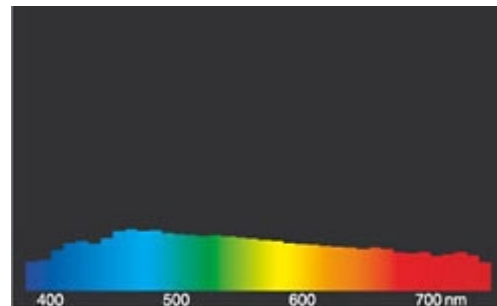

daylight(D 65)

General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages. Subject to change without notice. Errors and omissions excepted. ® = Registered trademark

All technical data without guarantee.