

## GENERAL

LOCATION:	Interior
CLASS:	CE (Class I)
IP RATING:	IP20
BATHROOM ZONE:	Zone 3
DRIVER REQUIRED:	No
INSTALLATION ORIENTATION:	Wall Mount-Horizontal & Vertical
MAIN MATERIAL:	Metal - Zinc
DIMENSIONS (mm):	H: 207 W: 260 D: 174
CUT OUT HOLE (mm):	-
RECESS DEPTH (mm):	-
FIRE RATING:	-
CABLE LENGTH (mm):	-
GROSS WEIGHT (kg):	1.87

## MAIN LAMP

LIGHT SOURCE:	LED E27/ES
WATTAGE:	12W
RECOMMENDED LAMP	12W MAX LED E27/ES
LAMP INCLUDED:	-
MAXIMUM LAMP LENGTH (mm):	118
LUMINOUS FLUX (lm):	Lamp Dependent
COLOUR TEMP (K):	Lamp Dependent
CRI (Ra):	Lamp Dependent
MACADAM ELLIPSE:	Lamp Dependent
TILT ADJUSTABLE ANGLE (°):	-
ROTATION ADJUSTABLE ANGLE (°):	-
LIFETIME (hrs):	Lamp Dependent
BEAM ANGLE (°):	Lamp Dependent

## SECONDARY LAMP

LIGHT SOURCE:	High Powered LED
WATTAGE:	4.1W
LAMP INCLUDED:	Yes (Integral)
MAXIMUM LAMP LENGTH (mm):	-
LUMINOUS FLUX (lm):	149
COLOUR TEMP (K):	2700
CRI (Ra):	90
MACADAM ELLIPSE:	3-Step
TILT ADJUSTABLE ANGLE (°):	90
ROTATION ADJUSTABLE ANGLE (°):	330
LIFETIME (hrs):	60000
BEAM ANGLE (°):	17

## ADDITIONAL INFORMATION:

SHADE INCLUDED:	Shade Sold Separately
SHADE MATERIAL:	-
SHADE FINISH:	-
F MARK:	-



CODE: 1406012  
FINISH: BRONZE



CODE: 1406013  
FINISH: MATT BLACK



CODE: 1406014  
FINISH: MATT NICKEL

## MAIN LAMP ELECTRICAL





SWITCHED:	Yes
DIMMABLE:	No
DIMMING METHOD:	-
SUPPLY FREQUENCY (Hz):	50/60
DRIVER/BALLAST VOLTAGE (V):	100-277
DRIVER LIFETIME (hrs):	30000
EFFICACY (lm/W):	Lamp Dependent

## SECONDARY LAMP ELECTRICAL:





SUPPLY FREQUENCY (Hz):	50/60
DRIVER/BALLAST VOLTAGE (V):	100-277
DRIVER LIFETIME (hrs):	30000
EFFICACY (lm/W):	36

# PRODUCT ELEVATIONS

With Cone 180 Shade

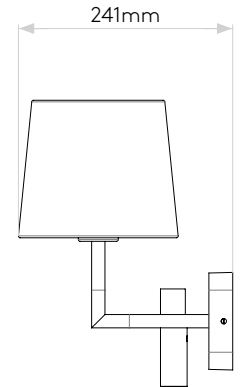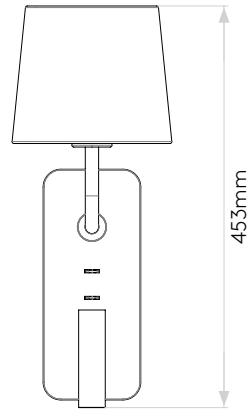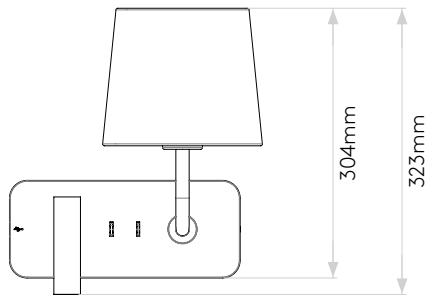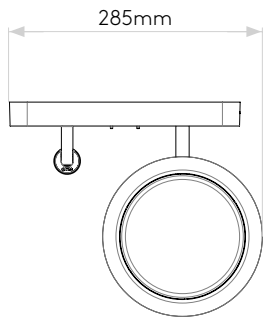

Without Shade

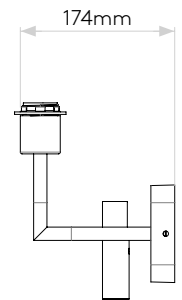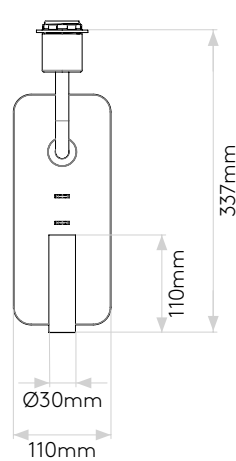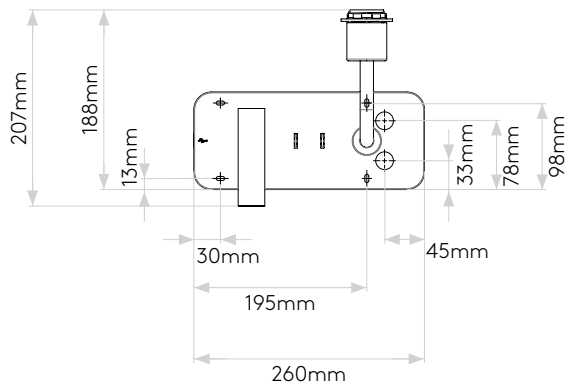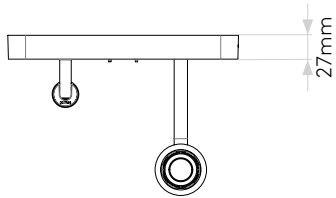

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes