


# TRIPLE "RISE AND FALL" CHANDELIER

TRIPLE  
"RISE AND FALL"  
CHANDELIER

MOUNTING  
DIAGRAM

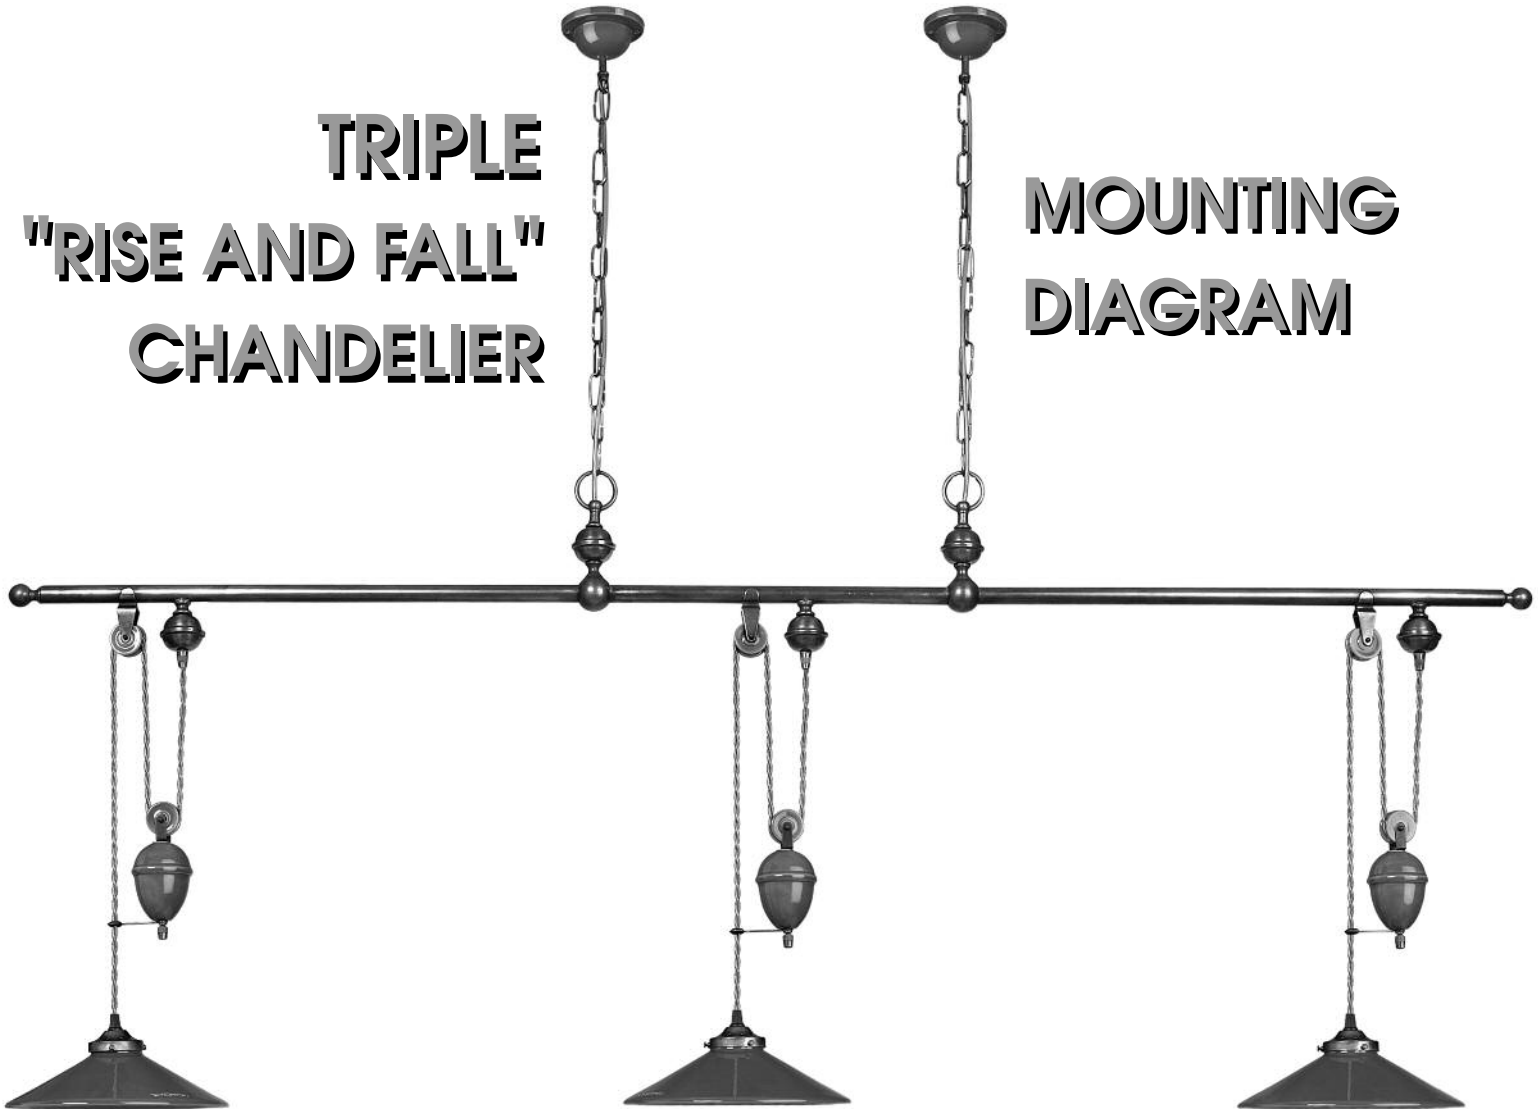


**Congratulations : you have just purchased  
the TRIPLE "RISE AND FALL" chandelier system ■**

**This system has been carefully manufactured by "TERRE D'HAUTANIBOUL" ■**

**If you should accidentally break one of the suspension elements,  
please remember that you can replace only that broken element ■**

**"TERRE D'HAUTANIBOUL" also makes suspensions, wall-mounted lamps,  
as well as all artistic articles for the table, kitchen,  
interior decoration, the kitchen and bathroom accessories assorted with  
your "RISE AND FALL" chandelier system, and in a wide range of other colors ■**

## LIST OF COMPONENTS

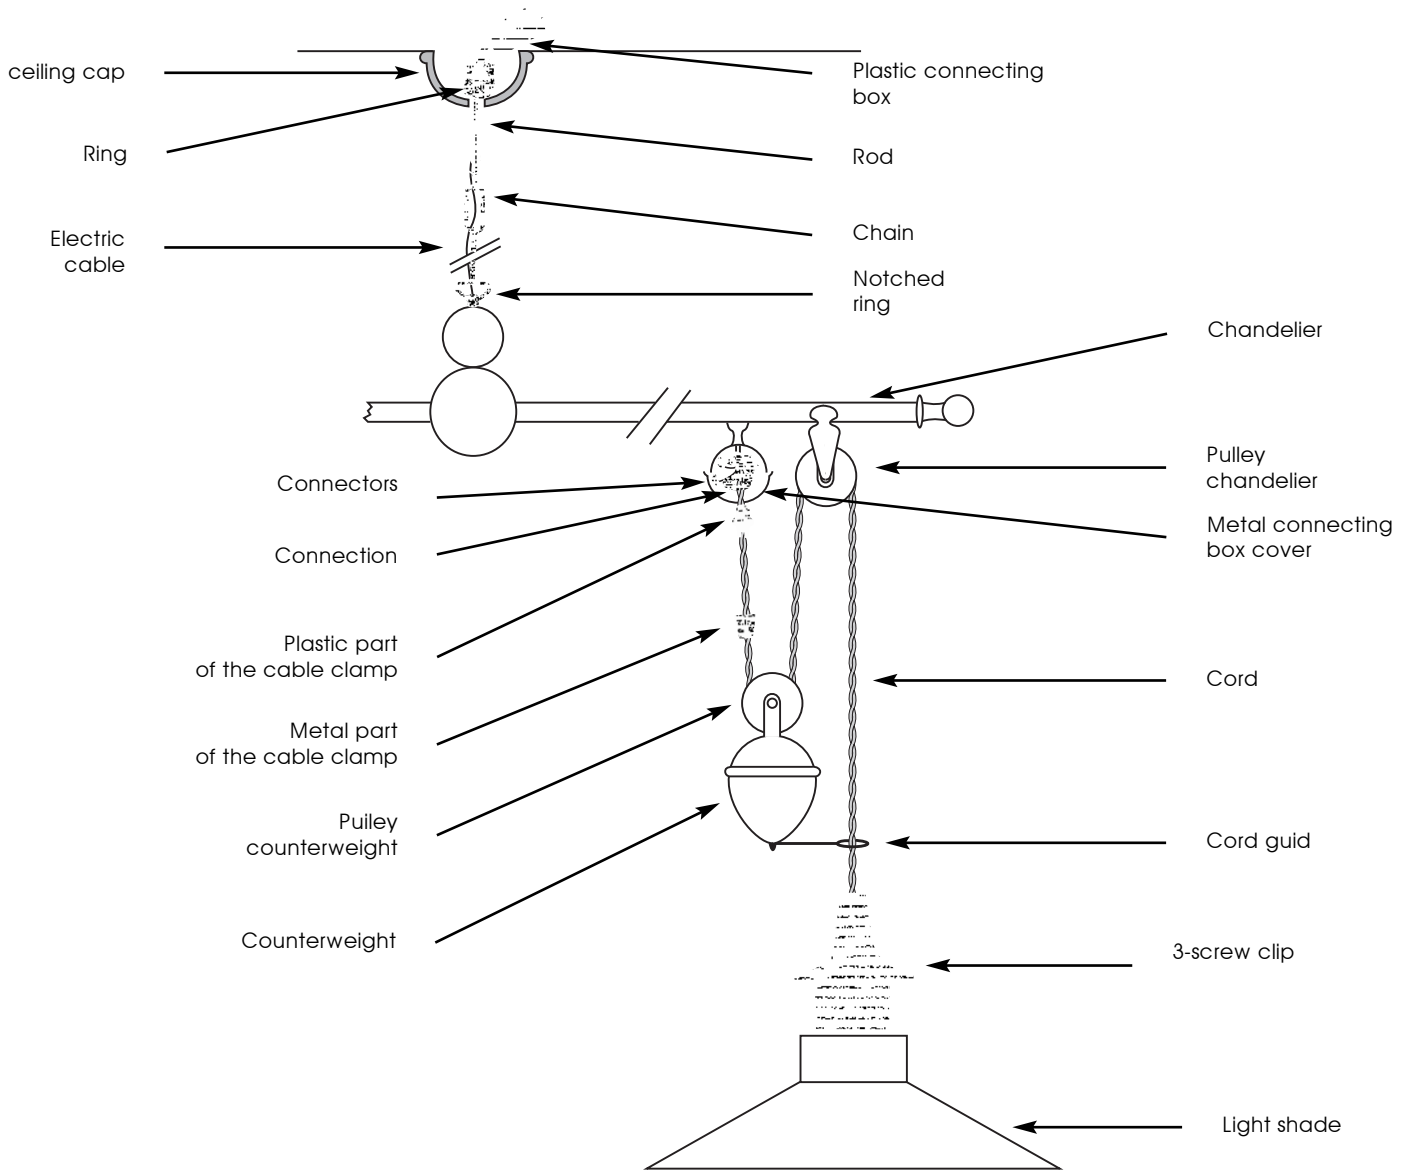

## MOUNTING PROCEDURE

- 1 Pass the cord into the cord guide of the counterweight in the bottom up direction.
- 2 Pass the cord into the pulley of the chandelier from the extremity toward the centre.
- 3 Pass the cord into the pulley of the counterweight by starting from the cord guide side.
- 4 Remove the metal part from the cable clamp by unscrewing it .
- 5 Remove the metal connecting box cover by unscrewing the plastic part from the cable clamp .
- 6 Insert the cord into the metal part of the cable clamp and then into the plastic part of the cable clamp.
- 7 Insert the cord into the metal connecting box cover.
- 8 Pass the cord into the connection.
- 9 Connect the cord's wires to the connectors.
- 10 Rescrew the plastic part of the cable clamp into the connection after the metal connecting box cover has been reinstated.
- 11 Rescrew the metal part of the cable clamp.
- 12 Repeat steps 1 to 11 above for others Rise and Fall.
- 13 Unscrew rings and thread rods in ceiling caps.
- 14 Rescrew rings on rods and suspend them using your ceiling hooks.
- 15 Attach the 3-screw clips on each light shade.
- 16 Adjust each rise and fall to the height you want.
- 17 Adjust the length of chains and electric cables of your chandelier to the length you want by adding or eliminating the right number of links and then cut the electric cables to the appropriate length to allow connecting the wires of your installation.
- 18 Connect the chandelier wires in the plastic connecting boxes with the wires of your installation.
- 19 Fix ceiling caps to your ceiling being careful to stop screwing as soon as the ceiling cap is in contact with the ceiling so as not to damage or break the ceramic section.
- 20 Equilibrate the chandelier by moving, if necessary, the last link of the chain on the notched ring.